



PART #: P-00565:63:25

FACEPLATE INFORMATION:

TYPE: T63-B4


OUTPUT: 0.18 kW

VOLT: 230 / 400V / 50HZ
208-230 / 460V / 60HZ


POLE: 4

QUANTITY: 1 PC

SIDE VIEW:

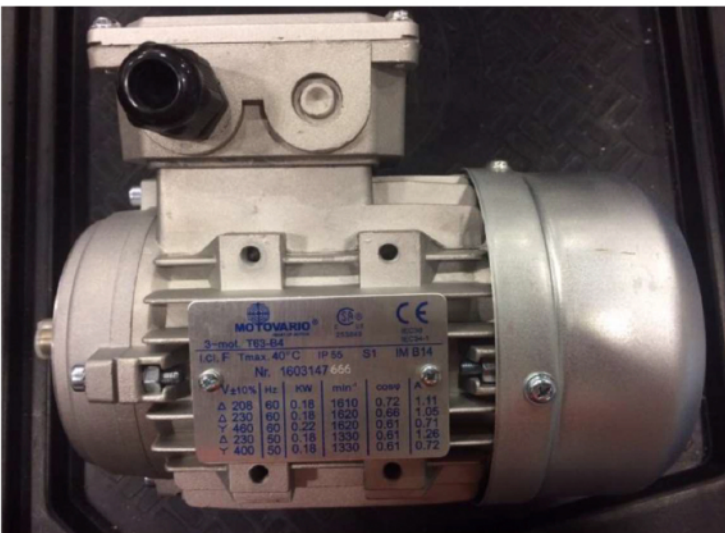

TOP VIEW:

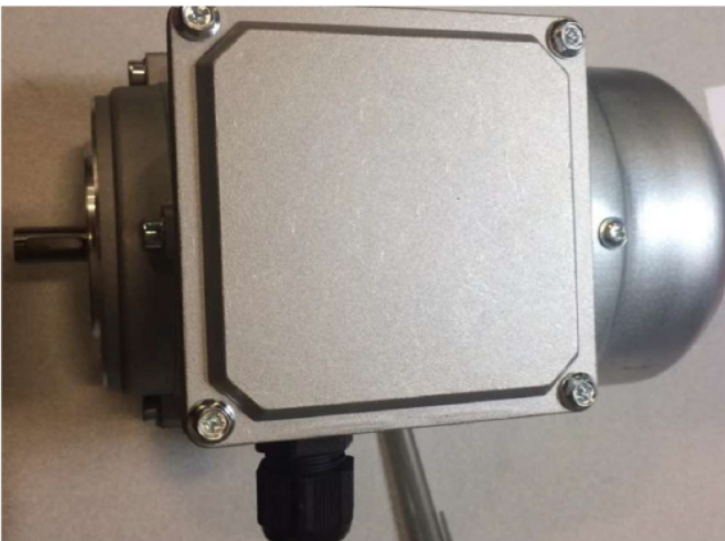

PART DESCRIPTION:

AC-MTR TT 0.18kW 4P 63B14 DR CE CSA CUS

Model: AC MOTOR T63-B4

Frame Size: 63

Power: 0.18kW / 0.25Hp

Poles: 4

230/400 Volts, 3 Phase, 50 Hz

208/230/460 Volts, 3 Phase, 60 Hz

Electrical Execution: DE-RATED with
Minimum service factor of 1.15

Mount: B14

Flange: 90mm Front End Shaft: 11mm x 23mm

Back End Shaft: NO

Terminal Connections: 6 PIN

Cooling: TEFC

Front and Back Shaft Oil Seal: YES

Service Duty: S1

Thermal Class: F

IP Protection Degree: IP55

Ambient Conditions: TROP 1

Approval: CE, CSA and CUS

Insulation Between Windings: YES

Terminal Box Cover: ALUMINUM

Fan: STANDARD

Thermal Protectors: NO

Cable Glands: Oversized M16 X 1.5

Bearings: STANDARD 2RS1

Fan Cover: STANDARD

Front end bell with oil seal 12x24x5

Back end bell with oil seal 12x24x5

Paint: Not Painted